


Panel Mount LCD Sunlight Readable Transflective

17"

Specifications

Model Name	PM175-350T
Viewable Size Image	17"
Active Display Area(mm)	337.92(H)x270.34(V)
Pixel Pitch(mm)	0.264(H)x0.264(V)
Number of Pixels	1280x1024
Contrast Ratio	400:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m ²)	350(typ.)
Viewing Angle(CR>=10)	-80~80(H);-60~60(V)
Synchronization Range Horizontal/Vertical	31.5~80.0KHz/56~75Hz
Recommended Resolution	1280x1024@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, 10%
Power Consumption	32W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW, IR

Remarks: PM175-350T series= VGA Input only
PM175-350TV series= VGA+Video Input

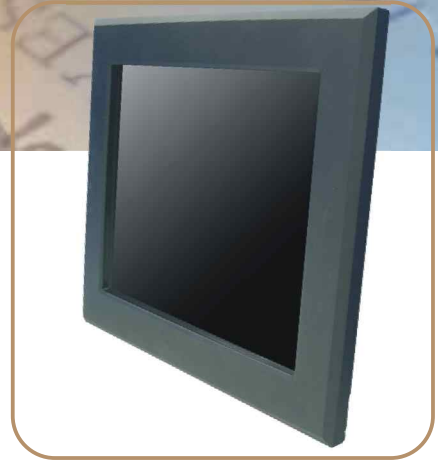

Mechanical Drawing

