

Panel Mount LCD



Panel Mount LCD



12.1"


Specifications

| | |
|--------------------------------|-------------------------------|
| Model Name | PM122-350 |
| Viewable Size Image | 12.1" |
| Active Display Area(mm) | 246.0(H)x184.5(V) |
| Pixel Pitch(mm) | 0.3075(H)x0.3075(V) |
| Number of Pixels | 800x600 |
| Contrast Ratio | 350:1(typ.) |
| Display Color | 262,144(6bit/colors) |
| Brightness(cd/m ²) | 350 |
| Viewing Angle(CR>=10) | -60~60(H);-50~40(V) |
| Synchronization Range | 31.5~48.1KHz/56~75Hz |
| Horizontal/Vertical | |
| Recommended Resolution | 800x600@60Hz,75Hz |
| Signal Connector | 15 pin D-Sub |
| Power Source | AC100~240V, Universal, 10% |
| Power Consumption | 40W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | No |
| Optional Touch Screen | Resistive,Capacitive,SAW,IR |

Remarks:PM122-350 series= VGA Input only

PM122-350V series= VGA+Video Input

Mechanical Drawing

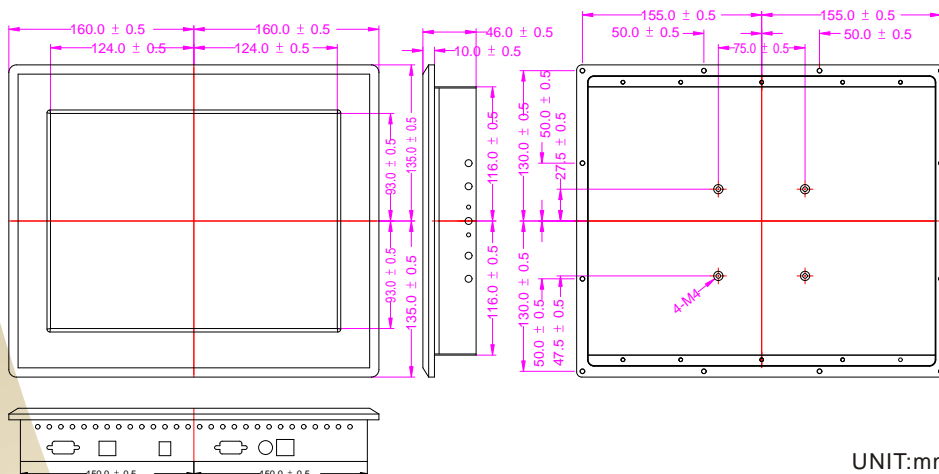

UNIT:mm

Industrial Image, Inc.
 2665 Pine Grove Rd. Ste 400
 Cumming, GA 30041
 PH: 770-205-6636 FAX: 770-205-6858